

63V, 6x25mm, Ceramic Tube Fuses
62 720.xx High Current



Description

- Time Delay
- 6x25mm physical size
- Designed to UL248-1/ UL248-14
- Lead Free material

Electrical Characteristics		
Rated Current	1.0In	2.0In
63A	4 hours Min.	120 sec Max.

Specifications


Specification					
Part No.	Rated Voltage	Rated Current	Breaking Capacity	Typ. Cold Resistance (mΩ)	Typical Pre-Arcing I ² t (A ² Sec)
	DC				
62 720.63	63V	63A	10000A @ 63VDC 20000A @ 56VDC *	0.74	7500

* Typical Pre-arcing I²t are measured at 10In Current;


* Self-certified for 56Vdc/20kA Breaking Capacity.

Dimension (unit: mm)


62 720.xx

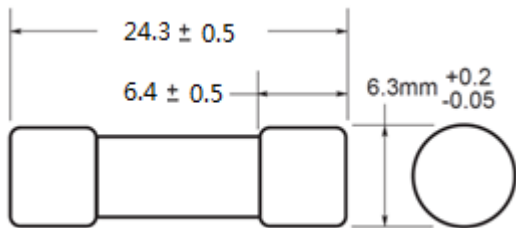


62 720.xxP

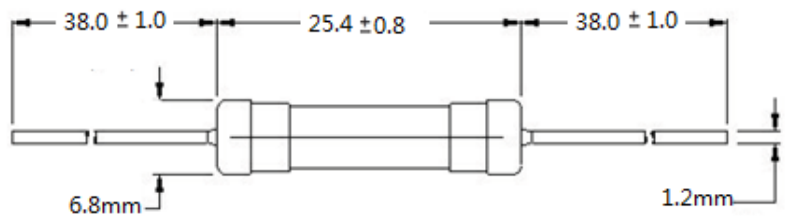

62 720.xx-BT

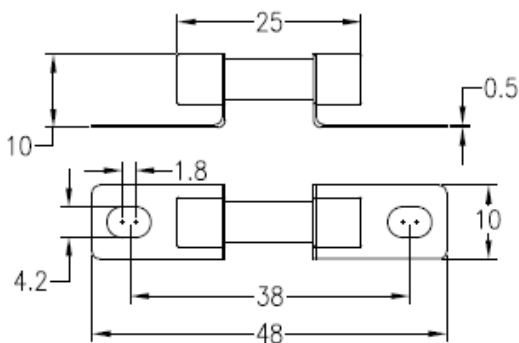


62 720.xxP-L

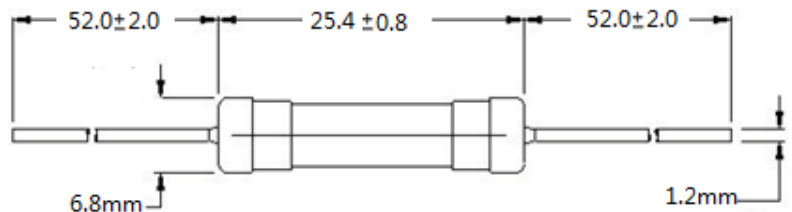

63V, 6x25mm, Ceramic Tube Fuses
62 720.xx High Current



Time Current Curve

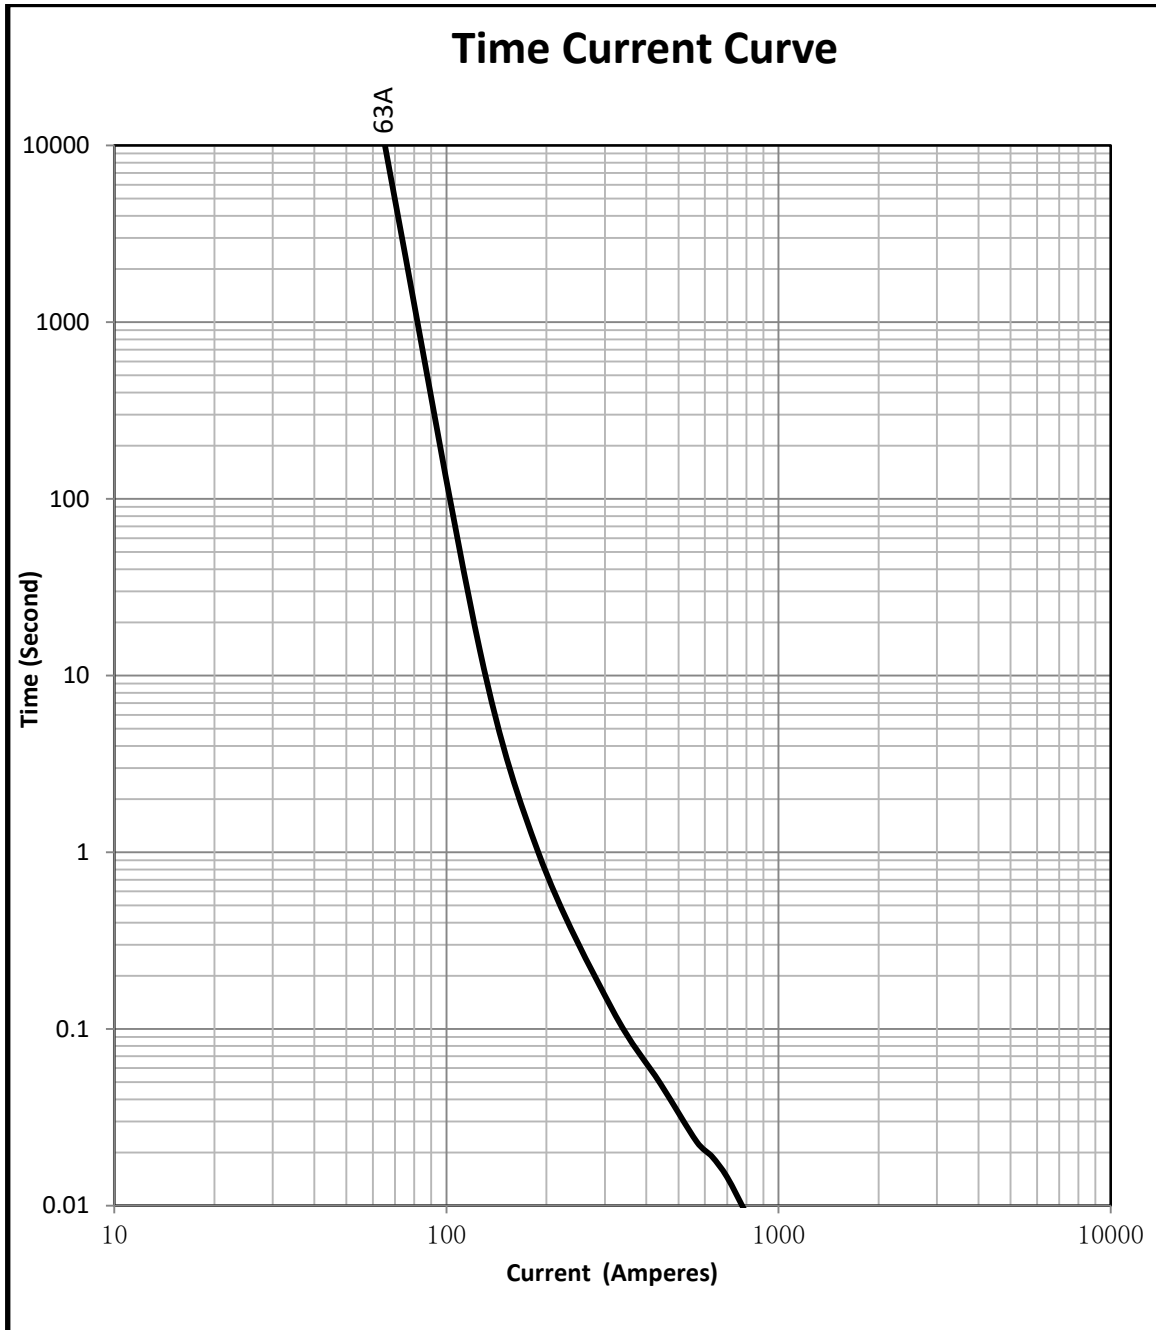

63V, 6x25mm, Ceramic Tube Fuses
62 720.xx High Current



Soldering Parameter

Wave Soldering:

Solder Pot Temperature: 270°C Max.

Solder Dwell Time: 10s Max.

Hand-Solder:

Solder Iron Temperature: 350°C+/- 5°C

Heating Time: 5s Max.

Temperature Re-Rating Curve

