

## 75V, 6x25mm, Ceramic Tube Fuses 62 720.XX ZG

### Description

- Time Delay
- 6x25mm physical size
- Ceramic tube, copper cap construction
- Designed to UL248-1
- Lead Free material


Electrical Characteristics		
Rated Current	1.0In	2.0In
30-50A	4 hours Min.	120 sec Max.

### Specifications

Specification					
Part No.	Rated Voltage	Rated Current	Breaking Capacity	Typ. Cold Resistance (mΩ)	Typical Pre-Arcing I <sup>2</sup> t (A <sup>2</sup> Sec)
	DC		75VDC		
62 720.30 ZG	75V	30A	2500A	1.9	5300
62 720.40 ZG		40A		1.28	12500
62 720.50 ZG		50A		1.0	18200


\* Typical Pre-arcing I<sup>2</sup>t are measured at 10In Current

### Dimension

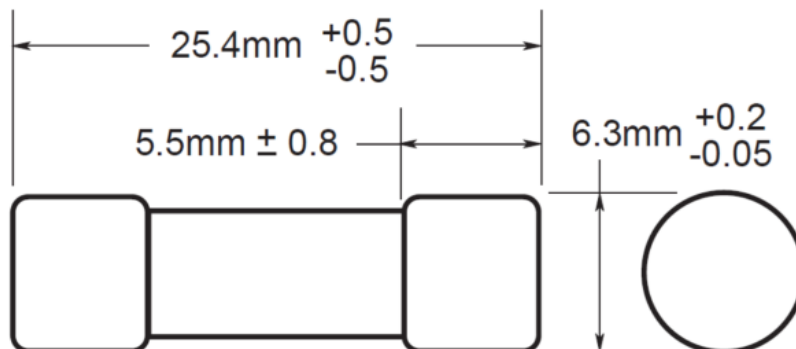

75V, 6x25mm, Ceramic Tube Fuses  
62 720.XX ZG

Time-Current Curve

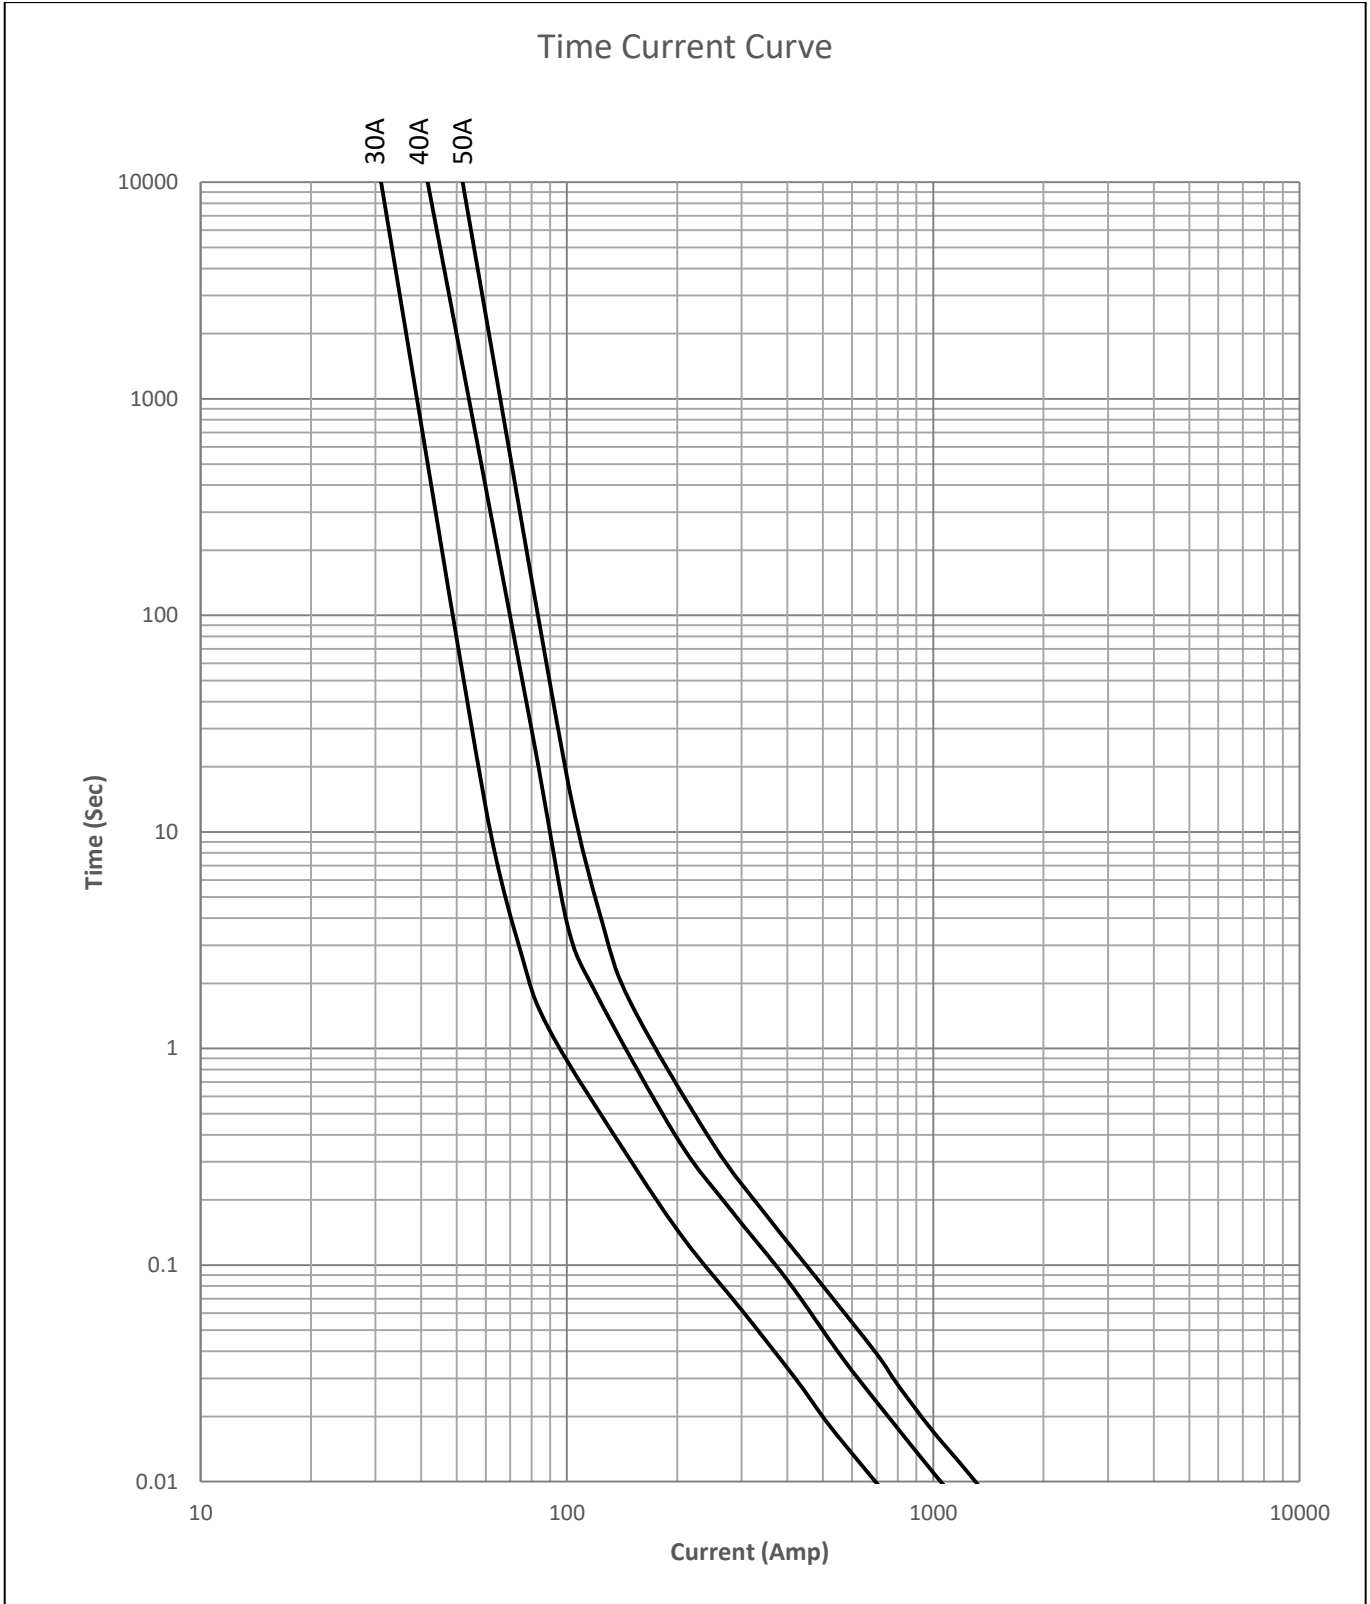

75V, 6x25mm, Ceramic Tube Fuses  
62 720.XX ZG



**Temperature De-rating Curve**

Operating Temperature: -40°C to +125°C, with proper derating factor applied

